


NOTES:

1. USE ONLY #8-32 X 3/8 PAN HEAD SCREWS (.094 MAXIMUM HEAD HEIGHT) TO SECURE CHASSIS BOX TO THE SLIDE CHASSIS SECTION USING THE FIRST AND LAST HOLES WITH A MAXIMUM SPACING BETWEEN SCREWS OF 8.00". (NOT ALL SCREWS SUPPLIED ARE REQUIRED FOR MOUNTING.)
2. MOUNT FRONT OF STATIONARY SECTION AS CLOSE TO FRONT CABINET RAIL AS POSSIBLE, LETTING REAR MOUNTING BRACKET PROVIDE THE ADJUSTMENT.
3. BRACKETS, BAR NUTS AND #10 SCREWS ARE SUPPLIED WHEN SLIDES ARE ORDERED WITH "CM9" CABINET MOUNT BRACKETS.
4. RIGHT HAND AND LEFT HAND SLIDE ARE THE SAME. LEFT HAND SHOWN. INVERT SLIDE TO MOUNT RIGHT HAND SIDE.
5. SLIDES WITH LO (LOCK-OUT) FEATURE ARE SUPPLIED IN PAIRS (RH,LH) TO INSURE SPRINGS ARE AT THE SAME LOCATION ON EACH SIDE.

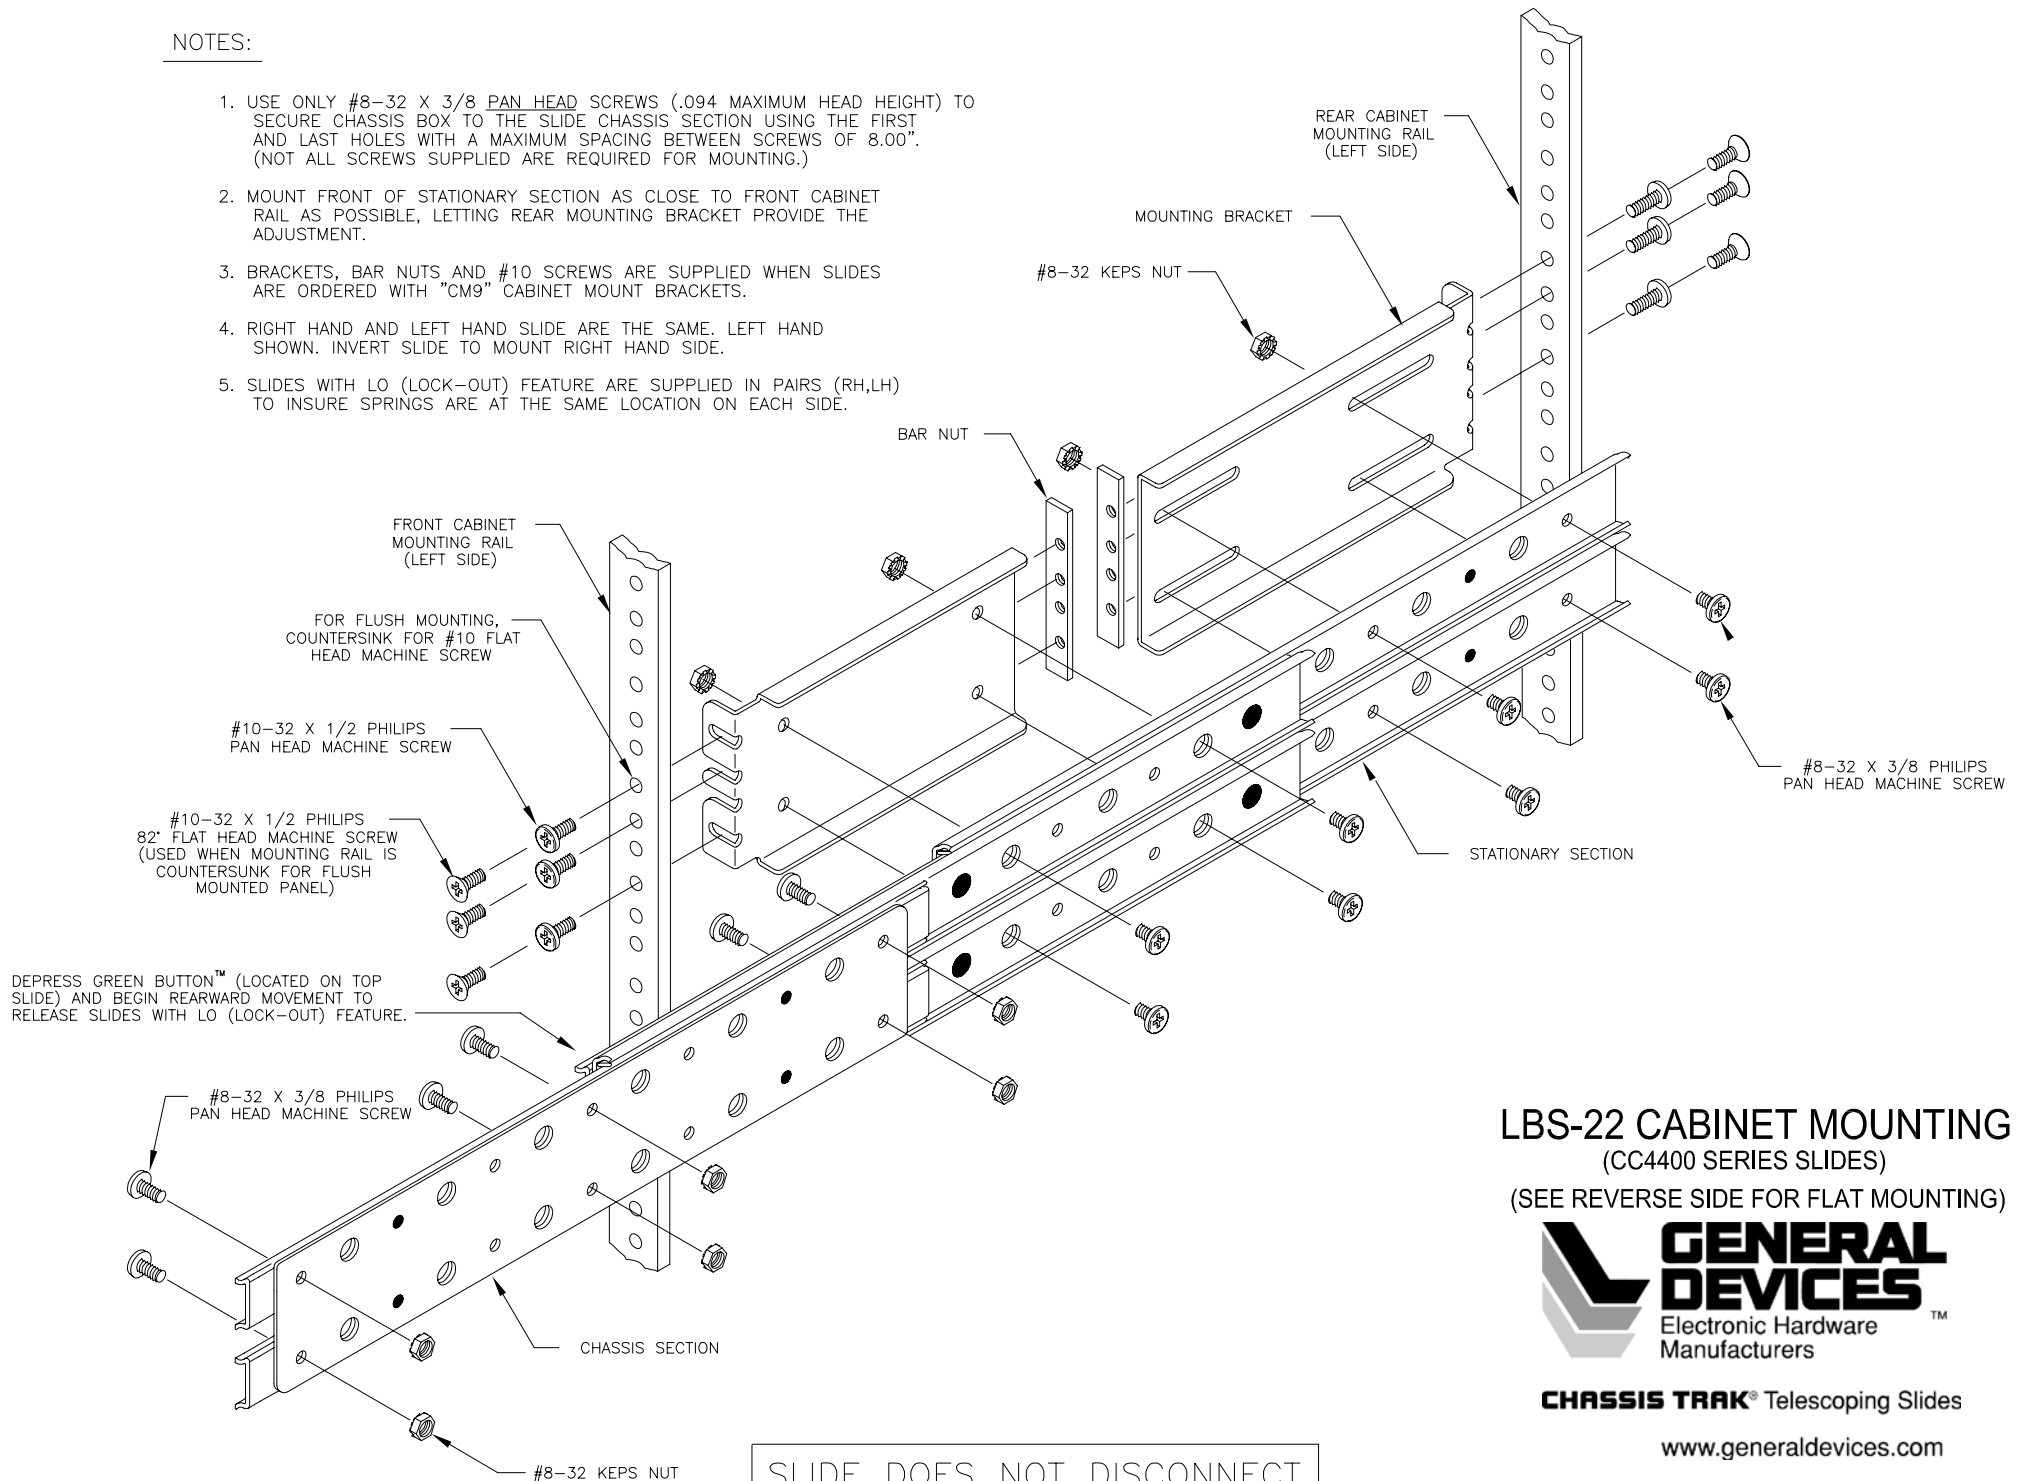

## LBS-22 CABINET MOUNTING (CC4400 SERIES SLIDES)

(SEE REVERSE SIDE FOR FLAT MOUNTING)




**CHASSIS TRAK®** Telescoping Slides

[www.generaldevices.com](http://www.generaldevices.com)

If you have questions please call 317-897-7000  
or send e-mail to [sales@generaldevices.com](mailto:sales@generaldevices.com)

## NOTES:

1. USE ONLY #8-32 X 3/8 PAN HEAD SCREWS (.094 MAXIMUM HEAD HEIGHT) TO SECURE CHASSIS BOX TO THE SLIDE CHASSIS SECTION USING THE FIRST AND LAST HOLES WITH A MAXIMUM SPACING BETWEEN SCREWS OF 8.00". (NOT ALL SCREWS SUPPLIED ARE REQUIRED FOR MOUNTING.)
2. RIGHT HAND AND LEFT HAND SLIDE ARE THE SAME. LEFT HAND SHOWN. INVERT SLIDE TO MOUNT RIGHT HAND SIDE.
3. SLIDES WITH LO (LOCK-OUT) FEATURE ARE SUPPLIED IN PAIRS (RH,LH) TO INSURE SPRINGS ARE AT THE SAME LOCATION ON EACH SIDE.

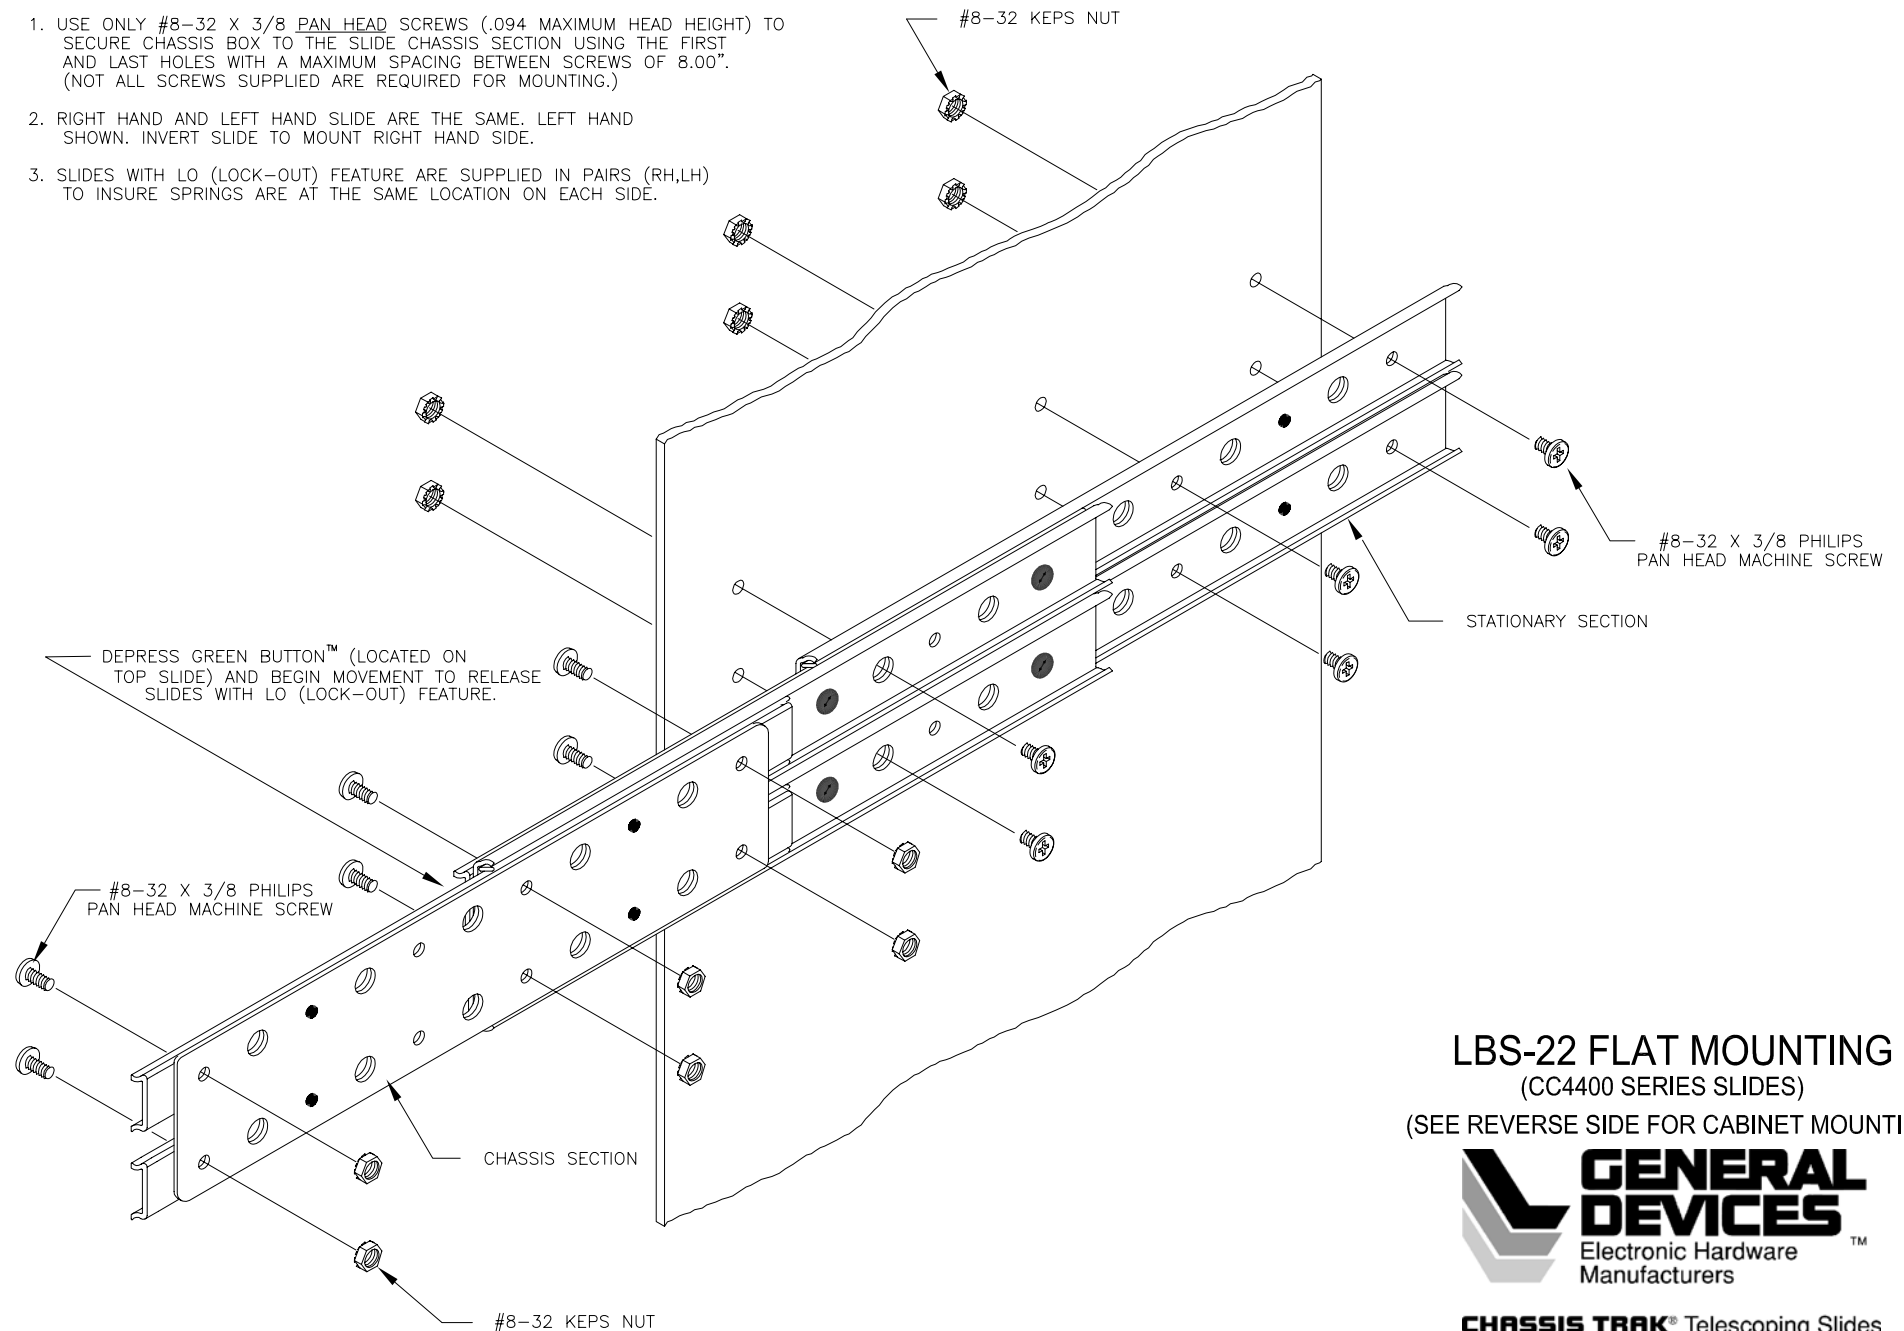

SLIDE DOES NOT DISCONNECT

## LBS-22 FLAT MOUNTING (CC4400 SERIES SLIDES)

(SEE REVERSE SIDE FOR CABINET MOUNTING)



**CHASSIS TRAK®** Telescoping Slides

[www.generaldevices.com](http://www.generaldevices.com)

If you have questions please call 317-897-7000  
or send e-mail to [sales@generaldevices.com](mailto:sales@generaldevices.com)